



Discriminating the early stages of *Sirex noctilio* infestation using classification tree ensembles and shortwave infrared bands

R. Ismail & O. Mutanga

To cite this article: R. Ismail & O. Mutanga (2011) Discriminating the early stages of *Sirex noctilio* infestation using classification tree ensembles and shortwave infrared bands, *International Journal of Remote Sensing*, 32:15, 4249-4266, DOI: [10.1080/01431161.2010.486413](https://doi.org/10.1080/01431161.2010.486413)

To link to this article: <http://dx.doi.org/10.1080/01431161.2010.486413>



Published online: 17 Aug 2011.



Submit your article to this journal [↗](#)



Article views: 164



View related articles [↗](#)



Citing articles: 13 View citing articles [↗](#)

Discriminating the early stages of *Sirex noctilio* infestation using classification tree ensembles and shortwave infrared bands

R. ISMAIL* and O. MUTANGA

Department of Geography and Environmental Studies, University of KwaZulu- Natal,
Private Bag X01, Scottsville 3209, South Africa

(Received 14 October 2008; in final form 28 February 2010)

The woodwasp *Sirex noctilio* is causing extensive damage to *Pinus patula* trees in the summer rainfall areas of South Africa. The ability to remotely detect *S. noctilio* infestation remains crucial for monitoring purposes and for the effective deployment of suppression activities. In this study, we evaluated whether random forest and boosting trees can accurately discriminate between healthy trees and the early stages of *S. noctilio* infestation using reflectance measurements in the shortwave infrared (SWIR). Three variable selection methods, namely, a filter, the random forest out-of-bag samples and a wrapper algorithm, were used to select the smallest subset of SWIR bands. The results show that random forest produces better classification results than the competing boosting trees for all three variable selection methods, even when noise is introduced into the SWIR bands and class labels. The ability of the bands centred at 1990, 2009, 2028, 2047 and 2065 nm to discriminate between healthy trees and the early stages of infestation could be explained due to the rapid physiological changes that occur as a result of the toxic mucus and a fungus that *S. noctilio* injects into the tree. Overall, the results are encouraging and show that there is a link between the selected SWIR bands and existing physiological knowledge, thereby improving the chances of detecting the early stages of *S. noctilio* infestation at a canopy or landscape level.

1. Introduction

Sirex noctilio (woodwasp) is currently the most important pest of conifers in South Africa, causing an estimated US\$45 million of damage in the summer rainfall areas of the country (Hurley *et al.* 2008). The nematode *Deladenus siricidicola* and parasitic wasps such as *Ibalia leucospoides* and *Megarhyssa nortoni* are used as biological control agents for the pest (Tribe and Cillie 2004). However, the ability to accurately detect *S. noctilio* (hereafter, referred to as *S. noctilio* infestations) remains crucial for the effective deployment of these biological control agents (Ismail *et al.* 2007). Researchers have shown that multispectral remotely sensed data can detect the later, more visible stages of *S. noctilio* infestations when the canopy of the attacked tree changes colour from green to yellow to reddish brown (Ismail *et al.* 2007, 2008b). However, a primary limitation remains on the effective discrimination between healthy trees and the early (or green) stage of *S. noctilio* infestations, which is a highly sought after goal, and from a management perspective could potentially help identify

*Corresponding author. Email: riyad.ismail@sappi.com

forests requiring intervention before they reach a point of no recovery (Ismail *et al.* 2008a).

High spectral resolution data (hyperspectral) has the ability to discriminate the early stages of insect infestations (Lawrence and Labus 2003, Pontius *et al.* 2005b, 2008) because the bands are narrow (10 nm or less) and small spectral differences can be distinguished (Schmidt and Skidmore 2001). Initial efforts at discriminating the green stage from healthy trees showed that bands centred at 500, 521, 685 and 760 nm have the greatest potential (Ismail *et al.* 2008a). The laboratory-based study by Ismail *et al.* (2008a) concentrated on the visible and near-infrared regions, but excluded the shortwave infrared (SWIR), a domain which researchers have shown to be a good and consistent indicator of conifer mortality (Collins and Woodcock 1996, Skakun *et al.* 2003, Jin and Sader 2005). More specifically, physiological evidence suggests that, during the green stage, *S. noctilio* injects toxic mucus and a fungus that causes an increase in enzyme activity associated with the conversion of foliar starch reserves to soluble sugars and a rise in respiratory activity which then results in the rapid depletion of soluble sugar levels (Neumann and Minko 1981). According to Kumar *et al.* (2001), starch is a polysaccharide of D-glucose and is the main food storage molecule of plants with absorption features located predominately in the SWIR. Starch has known SWIR absorption features located at 1450, 1560, 1700, 1770, 1930, 2100, 2320 and 2480 nm (Kumar *et al.* 2001). Therefore, this study intends to expand on the work by Ismail *et al.* (2008a) by determining if there are specific bands in the SWIR region that will allow for the accurate discrimination between healthy trees and the green stage.

In light of the future availability of hyperspectral data in South Africa (Scholes and Annamalai 2006, van Aardt and Coppin 2006) there is a keen interest amongst remote sensing researchers in developing robust methods and techniques that will allow for the accurate discrimination of the green stage of *S. noctilio* infestation. Additionally, these methods need to be automated to some level with limited human interaction to allow for critical evaluation (Soh 1999). However, hyperspectral data tend to be more difficult to process than the commonly used multispectral data due to the geometrical and statistical properties associated with high-dimensional data (Langrebe 2002). From a statistical perspective, the challenge is identifying the relevant bands from a large set of candidate bands (p) and a small number of samples (n). The 'small n large p problem' introduces multi-collinearity into the input data matrix which subsequently leads to instability into the classification process (Kavzoglu and Mather 2002). Various variable selection approaches have been proposed to reduce the 'curse of dimensionality' (Bruzzone and Serpico 2000, Kavzoglu and Mather 2002, Bajcsy and Groves 2004, Vaiphasa *et al.* 2005, 2007). These approaches can be basically divided into two categories based on whether they use the classification algorithm as part of the evaluation process (Guyon and Elisseeff 2003). If the variable selection is independent of the classification algorithm then the approach is defined as a filter approach, and if the variable selection is dependant on the classification algorithm then the method is defined as a wrapper (Kohavi and John 1997). The filter approach has been more commonly used to reduce the number of bands in hyperspectral applications (Schmidt and Skidmore 2001, Vaiphasa *et al.* 2005, Ismail *et al.* 2008a); however the wrapper approach is fast gaining popularity amongst some remote sensing researchers (Chan and Paelinckx 2008). A potential problem when using the filter approach which is relatively faster is that the ranking of the bands is carried out between pairs of bands and without any direct relation to the classification algorithm.

According to Granitto *et al.* (2006), in order to obtain unbiased estimates of error, especially in applications where $n < p$, the selection of variables should be included in the classification process and not treated as a separate pre-processing step. Therefore, an algorithm such as random forest (Breiman 2001), which provides an additional direct measure of variable importance, should be well suitable for the classification of hyperspectral data.

While popular methods such as support vector machines and neural networks are useful for the classification of hyperspectral data (Mutanga and Skidmore 2004, Pal and Mather 2004), these algorithms do not produce any insight regarding the bands that best contribute to the final classification (Archer and Kimes 2008). Alternatively, random forest has been successfully used for variable selection and for classification purposes in non-remote sensing domains (Svetnik *et al.* 2003, Svetnik *et al.* 2004, Diaz-Uriarte and Alvarez de Andres 2006, Granitto *et al.* 2006). With the exception of Chan and Paelinckx (2008), few applications in the remote sensing domain have evaluated the random forest for the combined purpose of classification and variable selection using hyperspectral data. Additionally, researchers (Gislason *et al.* 2006) have applied random forest to applications that classify phenomena or objects that have distinct spectral characteristics. In this study we evaluated random forest for variable selection and classification in a hyperspectral application (i) where the number of samples is less than the number of variables ($n < p$) and (ii) where classes have similar spectral characteristics. However, as no single algorithm has been demonstrated to be superior for all applications (Kohavi *et al.* 1997), it was necessary to test an additional competing classification tree ensemble known as boosting trees.

To summarize, in this article we evaluate whether two classification tree ensembles can accurately discriminate between healthy trees and the early stages of *S. noctilio* infestation using SWIR bands. More specifically, we examine the potential role of three variable selection methods to produce a subset of bands with the lowest misclassification error. Furthermore, we evaluated if the two classification tree ensembles can recover the signal in the hyperspectral data when the class labels or the reflectance values of bands are randomly altered. Given that the number of samples was limited in this study, it was not practical to subset the original observations for testing purposes. We therefore use the .632+ bootstrap error (Efron and Tibshirani 1997) to assess the classification accuracy of both algorithms.

2. Methods and materials

2.1 Site description

During April 2006, needle samples from healthy and green stage *Pinus patula* trees were collected from an *S. noctilio* attacked compartment (4 ha) located at the Sappi Pinewoods plantation (centroid 30°4'13.83" E and 29°38'36.06" S) in KwaZulu-Natal, South Africa (Ismail *et al.* 2008a). The site is located approximately 30 km west of the town of Pietermaritzburg, KwaZulu-Natal. The average altitude for the site is 1190 m with an average air temperature of 16.1°C (Macfarlane 2004). The mean annual rainfall of the area is 916 mm. The terrain consists of low mountains and undulating hills. The geology of the area is a mixture of mudstone, sandstone, tillite, amphibolite and basalt. Soils in the area are mostly sandy clay and sand-clay loams (Macfarlane 2004).

Before any sampling or spectral measurements were acquired, the pine trees were carefully examined with the assistance of experienced foresters and classified into mutually exclusive classes (i.e. healthy or green stage trees). The green stage trees are

characterized by the appearance of resin droplets along the trunk of the tree, the presence of ovipositors on the bark and a dark fungal stain appearing along the cambium. There is minimal needle loss and the canopy appears green, healthy and visibly indistinguishable from a healthy tree (Neumann and Minko 1981, Tribe and Cillie 2004). Tree climbers obtained samples from five green stage trees and four healthy trees located in the same compartment and within 20 m of each other. Additionally, the pine trees were of the same age and no other damaging agents were observed (Ismail *et al.* 2008a). The samples for each class were then obtained from three branches (upper, middle and lower crowns) with two needle samples from the same branch.

2.2 Spectral data acquisition and processing

In situ spectral measurements of the needle samples ($n = 54$) were acquired on a clear sunny day between 10:00 a.m. and 2:00 p.m. using the analytical spectral devices (ASD) Field Spec Pro FR spectroradiometer (ASD Inc., Boulder, CO, USA). The ASD senses in the 350–2500 nm spectral range and has a spectral sampling interval between 1.4 and 2.0 nm with a spectral resolution of 3 and 12 nm (ASD 2006). The instrument (equipped with a field of view of 25°) was mounted on a tripod and positioned 0.5 m above each sample at the nadir position. Following ASD measurement protocols, reflectance spectra were obtained by calibrating the radiance of the target samples with the radiance of a standard (white reference panel, spectralon) of known spectral characteristics. The needle samples from the green stage ($n = 30$) and healthy trees ($n = 24$) were arranged side-by-side on a vinyl mount to form solid mats because the needles were too small to fill the ASD field of view (Stimson *et al.* 2005). Using the technique described by Stimson *et al.* (2005), the needles were arranged in a contiguous manner without any overlapping needle or leafy shoots and care was taken to minimize the gap between needles. Additionally, to minimize error, 10 spectral reflectance measurements were averaged for each sample and individual samples were rotated 30° between scans (Pontius *et al.* 2005a). Since current hyperspectral sensors do not reach such a fine spectral resolution as the ASD, we subsequently resampled the ASD spectral reflectance to Hyperspectral Mapper (HyMAP) bands using ENVI 4.2 (<http://www.itvis.com/envi>). The method used a Gaussian model with a full width at half maximum (FWHM) equal to the band spacing provided (Mutanga and Skidmore 2005). HyMAP provides 64 bands covering the SWIR region. The resampled HyMAP bands (table 1) were used in all subsequent analysis.

Table 1. The spectral configuration of the Hyperspectral Mapper sensor. The sensor provides contiguous sampling of the spectral reflectance except for the water absorption bands centred at 1400 and 1900 nm.

Module	Spectral range (nm)	Bandwidth across module (nm)	Average spectral sampling interval (nm)
SWIR1	1400–1800	15–16	13
SWIR2	1950–2480	18–20	17

2.3 Classification procedures

2.3.1 Random forest. The Breiman–Cutler random forest algorithm (Breiman 2001) is an ensemble method that grows multiple classification trees (*n*tree) and uses the entire forest as a complex composite classifier. As opposed to single classification trees, individual trees in the forest are maximally grown without any pruning and the final classification of a given sample is decided by applying the majority rule over the votes of individual trees. The random forest (RF) ensemble introduces randomness in the classification process by firstly selecting only a random subset of candidate features (*m*try) to determine the split at each node in a tree and secondly using a bootstrap sample with replacement from approximately two-thirds of the dataset ($n = 54$) to create each tree in the forest. This implies that in some instances training samples will be chosen more than once, while some training samples may not be used at all to grow individual trees in the forest. The excluded one-third of the samples or the out-of-bag (OOB) estimates are used to determine an internal measure of variable importance and an estimate of error (Breiman 2001, Liaw and Wiener 2002, Pal 2005). The OOB error estimate is calculated by putting each OOB sample down the corresponding classification tree from which it was excluded. The error estimate is then calculated as the misclassified proportion of that OOB sample (Breiman 2001, Liaw and Wiener 2002, Pal 2005, Garzon *et al.* 2006, Prasad *et al.* 2006, Peters *et al.* 2007). We implemented the random forest library (Liaw and Wiener 2002) using the R statistical software (R Development Core Team 2008).

2.3.2 Boosting trees. We compared RF with a competing ensemble method, boosting trees (Freund and Shapiro 1996). While RF relies on bootstrapped aggregations of the original training data to generate individual trees in the ensemble, boosting trees (BT) rely on the classification results from a previous iteration. Boosting methods grow a single classification tree and weights are assigned to the training data. Hence, training data that are misclassified are increased in weight while training data that are correctly classified are decreased in weight. This forces subsequent classification trees to focus on the more ‘difficult’ examples in the dataset. This entire process is repeated for a specific number of iterations and the resulting classification tree vote using a plurality rule (Freund and Shapiro 1996, Lawrence *et al.* 2004, Pal 2007, Chan and Paelinckx 2008). For boosting we used 100 iterations; however if the algorithm terminated earlier, then a smaller iteration was subsequently used (Dietterich 1999). We used the *ada* library (Culp *et al.* 2006) for the R statistical software (R Development Core Team 2008) to implement the AdaBoost version (Freund and Shapiro 1996) of boosting by weighting.

2.4 Variable selection

We evaluated the one-way analysis of variance (ANOVA) as a baseline filter approach. As mentioned earlier, when implementing the filter method, bands with no statistical significance are discarded while the significant bands are used as input variables into the relevant classification algorithm. In contrast, the wrapper approach searches for the best subset of bands using the classifier as part of the evaluation and the subset of bands that produces the lowest misclassification error are then selected. We used the wrapper developed by Diaz-Urriarte and Alvarez de Andres (2006). Since the RF algorithm provides an internal measure of variable importance, we also

considered the top 10 and 20% of variables as ranked by the OOB samples. The sections below describe the OOB and wrapper methods in more detail.

2.4.1 Using the out-of-bag method for variable selection. Random forest returns three measures of variable importance (Breiman 2001). The first measure is based on the number of times each candidate variable is selected; the second measure is based on the Gini index, which measures the impurity of a predictor variable with respect to the response variable (Pal 2005) and the final measure utilizes the permutation of variables as an estimate of variable importance (Strobl *et al.* 2007). The most reliable measure is the permutation of variables which calculates variable importance as the mean decrease in classification accuracy using the OOB samples (Breiman 2001). According to Strobl *et al.* (2007), by randomly permuting the reflectance values of a single band, its original association with the response variable is broken. The permuted band and the remaining non-permuted bands are then used to classify the response for the OOB sample. It follows that the classification accuracy will decrease substantially if the original band was associated with the response variable. Thus, the difference in classification accuracy before and after permuting the bands can be used as a measure of variable importance (Breiman 2001).

2.4.2 Using the wrapper method for variable selection. We used a backward variable selection (BVS) method that starts with all the bands and then progressively eliminates the least promising bands. The BVS method developed by Diaz-Uriarte and Alvarez de Andres (2006) builds multiple random forests and, after building each random forest, iteratively discards 20% of the bands with the smallest variable importance. After developing all models, we then selected the subset of bands whose OOB error rate is within u standard errors of the minimum OOB error of all the forests created. Setting $u = 0$ selects the subset of bands with the smallest OOB error and setting $u = 1$ selects the smallest subset of bands but whose OOB error is within the sampling error from the best solution (Diaz-Uriarte and Alvarez de Andres 2006). We used the *varSelRF* library (Diaz-Uriarte and Alvarez de Andres 2006) for the R statistical software (R Development Core Team 2008) to implement the BVS method. According to Granitto *et al.* (2006), the selection of variables is an unstable process especially when $n < p$, and this could subsequently lead to the selection of very different subsets of explanatory variables for each replicate of the study. Therefore, we repeated the BVS method (repetitions = 1000) to determine the frequency that the selected bands appear in subsequent replicates of the study.

2.5 Accuracy assessments

Classification accuracy in the absence of an independent test dataset can be determined by resampling of the original data (Molinaro *et al.* 2005). Several variants of the bootstrap resampling method have been introduced to estimate error (Efron and Tibshirani 1993). In this study we applied the .632+ bootstrap method (Efron and Tibshirani 1997) to compare the overall classification accuracy of the three variable selection methods using RF and BT. The method is based on a random sample that is repeatedly drawn with replacement from the original observations. For each draw, the observations that are left out serve as a test dataset. However, this leads to an overestimation of error because a decrease of samples in the training dataset leads to an increase in bias (Molinaro *et al.* 2005). To correct the bias in error, the .632+

bootstrap method uses a weighted average of the resubstitution error (Efron and Tibshirani 1997).

The .632+ bootstrap method was previously used to assess overall misclassification error in chemometric and genomic studies in applications where $n < p$ (Diaz-Uriarte and Alvarez de Andres 2006, Granitto *et al.* 2006). It should be noted that in this study we applied the .632+ bootstrap method (bootstrap replications = 100) as an ‘outer loop’ to compare the three variable selection methods using RF and BT, whereas the OOB error was used as an ‘inner loop’ to guide the variable selection for the wrapper and the OOB variable selection methods (Diaz-Uriarte and Alvarez de Andres 2006, Granitto *et al.* 2006). Therefore, the classification tree ensembles are evaluated on a dataset which was not previously used for variable selection or for classification purposes. We used the *errorest* library (Peters *et al.* 2002) for the R statistical software (R Development Core Team 2008) to calculate the .632+ bootstrap error.

2.6 Class label and band noise

In this study we also assess the robustness and stability of the classification tree ensembles against the introduction of noise. Remotely sensed data is most likely to be noisy due to factors that include saturation of signal, missing scans, mislabelling, problems with the sensor and geometry (DeFries and Chan 2000). In order to determine if the classification tree ensembles would perform well under conditions where noise is introduced, we applied the classification tree ensembles to noisy data and then examined the resulting misclassification error as determined by .632+ bootstrap error (bootstrap replications = 100).

Similar to the method implemented by Dietterich (1999), Breiman (2001) and Hamza and Larocque (2005), we randomly (without replacement) in increments of 5% (up to a maximum of 20%) changed the values of the class labels and the reflectance values of the best subset of SWIR bands. As a result, we replaced the original values with values chosen from all other reflectance (%) and class label (i.e. healthy and green) values. Following suggestions by Zhu and Wu (2004), the impacts of the two categories of noise (class labels and bands) were analysed independently because it would be difficult to consider the combined effects of both categories.

3. Results

3.1 Variable selection using the filter method

The ANOVA with a Tukey’s HSD *post-hoc* test was calculated at each measured band for the healthy and green stage (H-G) class pair. The ANOVA results of the individual bands (64 bands) are shown in figure 1. The shaded areas in figure 1 indicate specific bands (54 bands) where the H-G class pair shows a significant statistical difference in reflectance ($p < 0.001$). Bands that have the potential to discriminate between the H-G class pair are centred in the following SWIR regions: 1409–1613 nm (16 bands), 1739–1799 nm (6 bands) and 1952–2485 nm (32 bands). The majority of the significant bands (59.25%) are predominately centred between 1952 and 2485 nm (HyMAP SWIR 2). All significant bands were then retained as input variables into the classification tree ensembles.

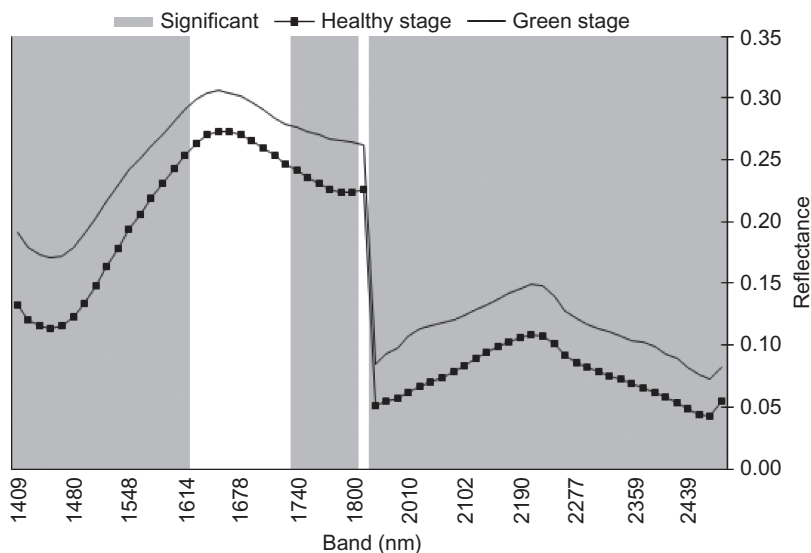


Figure 1. Analysis of variance results for the healthy-green class pair using the resampled Hyperspectral Mapper bands. The grey shades indicate regions of electromagnetic spectrum where there were significant differences ($p < 0.001$). For contextual purposes the average shortwave infrared reflectance for the green stage ($n = 30$) and for the healthy stage ($n = 24$) are shown.

3.2 Variable selection using the out-of-bag method

The *mtry* parameter denotes the number of bands that RF randomly selects to build each tree and the default *mtry* parameter is equal to the square root of the total amount of HyMAP SWIR bands (Liaw and Wiener 2002). However, following suggestions by Diaz-Uriarte and Alvarez de Andres (2006) and Hamza and Larocque (2005), we optimized the *mtry* parameter by trying all possible values ranging from 1 to 64. Results show that the default *mtry* parameter of eight produced the lowest OOB error (9.26%). Additionally, we found that there was no significant increase in classification accuracy beyond 500 trees (*ntree*) in the ensemble.

Subsequently, an *mtry* value of eight and an *ntree* value of 500 were used as input parameters for RF. As mentioned earlier, in addition to classification, RF also calculates variable importance based on the mean decrease in classification accuracy using the OOB method (Breiman 2001). Figure 2 shows the importance of all bands as determined by the OOB method. Noticeable in figure 2 are the number of important bands centred between 1971 and 2101 nm (eight bands). Additional important bands are centred between 2326 and 2485 nm (seven bands). The bands with the highest mean decrease in accuracy are centred at 2028 and 2047 nm, respectively. Since the OOB method produces a ranking for all bands, we will only consider the top 10% (six bands) and 20% (13 bands) of the highest ranked bands for classification purposes.

3.3 Variable selection using the wrapper approach

The BVS method iteratively built multiple random forests (iterations = 15) while discarding 20% of the least important bands as determined by the OOB samples (figure 3). We used an *ntree* value of 500 and the default *mtry* values for all iterations.

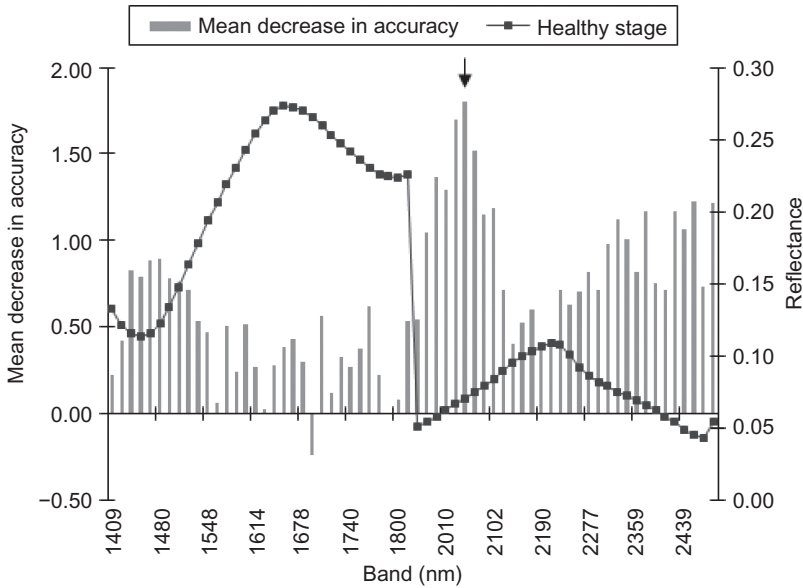


Figure 2. Variable selection using random forest. The forest was created using all the resampled shortwave infrared bands. The bands with the highest mean decrease in accuracy are shown by the black arrow. The average reflectance of the healthy stage is shown for contextual purposes.

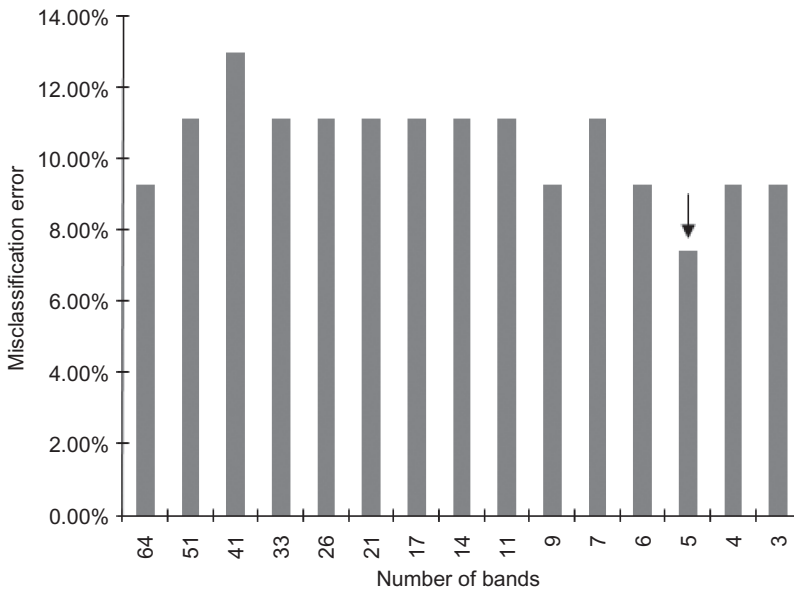


Figure 3. Misclassification error estimates for all random forest classifiers (iterations = 15) as determined by the out-of-bag sample. The lowest misclassification error is shown by the black arrow.

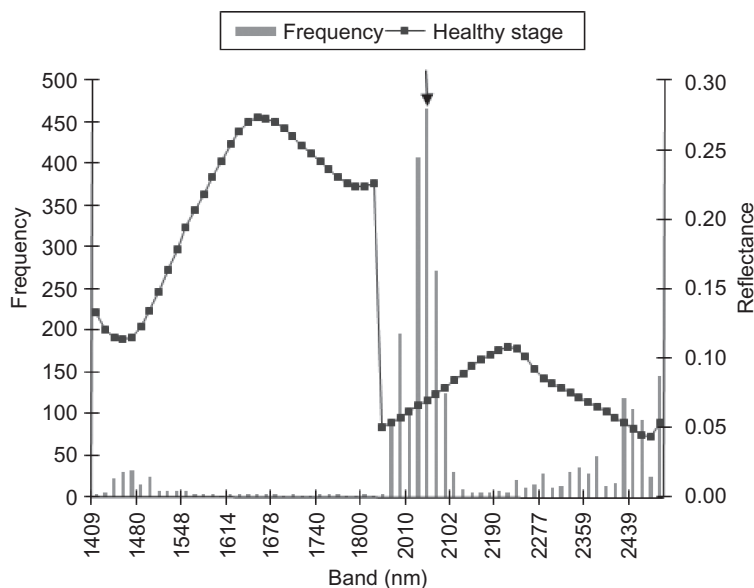


Figure 4. The frequency that backward variable selected bands occur in the selected subset of bands during each replicate ($n = 1000$) of the study. The bands that are most frequently selected by the approach are shown by the black arrow.

Figure 3 shows that the lowest misclassification rate (7.41%) as determined by the OOB error is obtained when using five variables centred at the following bands: 1990, 2009, 2028, 2047 and 2065 nm. Analogous to the findings of Diaz-Uriarte and Alvarez de Andres (2006), we found that u parameter had minor effect on the results of the BVS. However, experiments showed that a value of $u = 1$ leads to a slightly more stable result with a smaller subset of bands. Hence, we used $u = 1$ for all subsequent replicates of the study.

We repeated the entire BVS method (repetitions = 1000) to determine the frequency that the 1990, 2009, 2028, 2047 and 2065 nm bands occur in the best selected subset of bands. Although no bands are selected more than 50% of the time, figure 4 shows that the BVS selected bands have a much higher frequency of being selected than any of the other bands in the SWIR domain. More specifically, the bands are selected as follows: 1990 nm (frequency = 196), 2009 nm (frequency = 103), 2028 nm (frequency = 407), 2047 nm (frequency = 466) and 2065 nm (frequency = 271). The 2028 and 2047 nm bands are most frequently selected by the BVS method.

3.4 Classification results

This section compares the results from the three variable selection methods and reports on the misclassification rate as determined by the .632+ bootstrap error. For comparative purposes, figure 5 shows the frequency and location of bands that were selected by all three variable selection methods (i.e. ANOVA, OOB and BVS). The five bands centred at 1990, 2009, 2028, 2047 and 2065 nm were selected by all three variable selection methods. Also noticeable is the absence of selected bands between 1614 and 1740 nm. The various band selections were then used as input variables into RF and BT. Table 2 reports on the misclassification rate for both

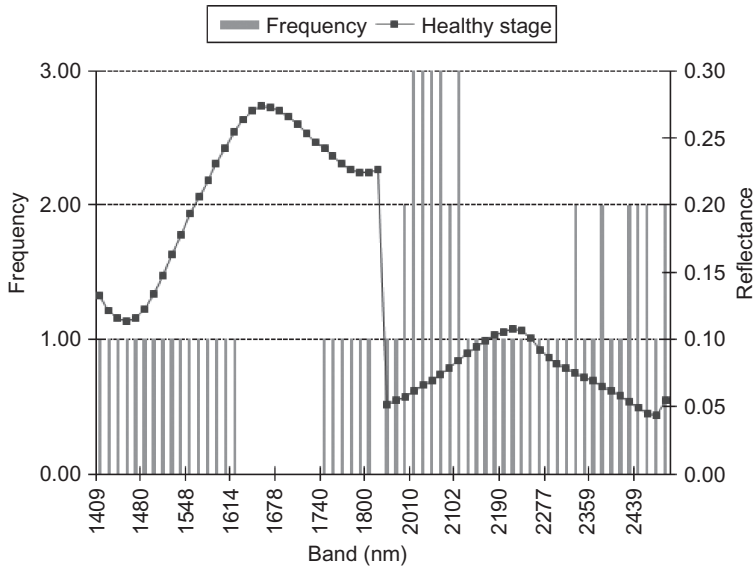


Figure 5. The combined frequency and location of bands using the analysis of variance, the out-of-bag and the backward variable selection methods. The average reflectance of the healthy stage is shown for contextual purposes.

Table 2. The misclassification rate for random forest and boosting trees as determined by the .632+ bootstrap errors using the bands selected by the analysis of variance, backward variable selection and the out-of-bag (top 10 and 20%) methods.

	All bands	Analysis of variance	Backward variable selection	Top 10%	Top 20%
Number of bands	64	54	5	6	13
Boosting trees	7.43%	7.51%	7.54%	7.57%	6.82%
Random forest	7.29%	7.45%	6.14%	6.52%	6.60%
Classification tree	11.25%	11.25%	8.74%	8.85%	10.43%

classification tree ensembles as determined by the .632+ bootstrap errors. Additionally, for comparison purposes the misclassification error for a single classification tree (Breiman *et al.* 1984) is also shown in table 2.

The .632+ bootstrap error for a single classification tree is above 8% whereas the misclassification errors of RF and BT using the three variable selection methods are comparable and below 8%. However, RF produces slightly better classification results than BT for all three variable selection methods, including when all HyMAP SWIR bands (64 bands) are used for classification. Using the bands (i.e. 1990, 2009, 2028, 2047 and 2065 nm) selected by the BVS method as input variables into RF (i) produces better accuracies than using all the HyMAP SWIR bands, (ii) produces the lowest overall misclassification error (6.14%) and (iii) produces the largest difference in error (1.4%) between RF and BT. Bands selected by the ANOVA (54 bands) produce the

highest misclassification error (7.45%) for RF. Using the top 10 or 20% of bands selected by the OOB method with RF produces comparable results with the best solution. BT achieves the lowest misclassification error (6.82%) when using the top 20% (13 bands) of bands selected by the OOB method. Bands selected by either the ANOVA or the BVS variable selection methods do not produce better classification results when compared to the using all the bands with BT.

3.5 Class label and band noise

This section examines the robustness of the classification tree ensembles against changes in the class labels and reflectance values and reports on the resulting misclassification error as determined by the .632+ bootstrap errors. For consistency, we used the bands (1990, 2009, 2028, 2047 and 2065 nm) that produced the lowest misclassification error to determine if both classification tree ensembles would perform well under conditions where noise is introduced. Figure 6 shows the .632+ bootstrap errors (replications = 100) for all noise levels as a result of changing the class labels. Mislabelling of the class labels causes severe problems in terms of the classification accuracy for both classification tree ensembles. However, comparatively, BT shows a higher increase in misclassification error when compared to RF for all noise levels. RF has a minimum error of 12.56% and a maximum error of 18.15% compared with the original misclassification error of 6.14%. On the other

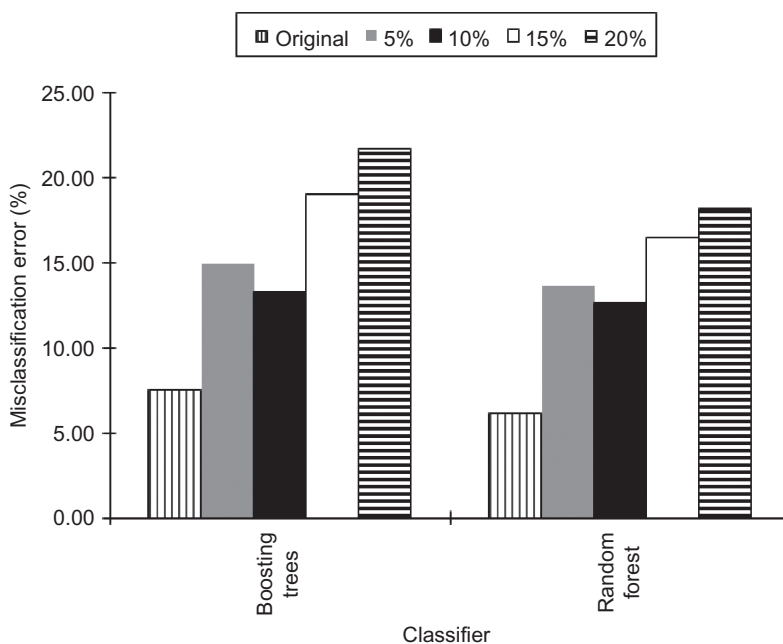


Figure 6. The .632+ bootstrap errors (bootstrap replications = 100) when random noise (%) is introduced into the class labels. Noise was introduced into the class labels by randomly replacing the original class label with the alternate value ('green' was changed to 'healthy' and 'healthy' was changed to 'green'). Class labels were replaced in increments of 5% up to a maximum of 20%.

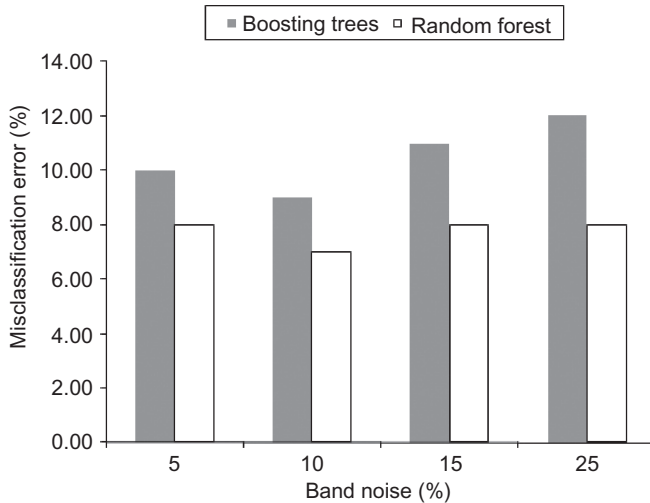


Figure 7. The .632+ bootstrap errors (bootstrap replications = 100) when random noise (%) is introduced into the best subset of shortwave infrared bands. Noise was introduced into the best bands by randomly replacing the original reflectance values with values selected from all other possible shortwave infrared reflectance values. Reflectance values in the best bands were replaced in increments of 5% up to a maximum of 20%.

hand, BT has a minimum error of 13.27% and a maximum error of 21.62% compared with the original misclassification error of 7.54%.

Figure 7 shows the .632+ bootstrap errors (replications = 100) when noise is introduced into the reflectance values of the BVS selected bands. Changing the reflectance values has a more pronounced effect on the misclassification error of BT. The misclassification error rate of RF remains below 8% for all noise levels, while the error rates for BT are all above 8%. RF has a minimum error of 6.77% and a maximum error of 7.80% compared with the original misclassification error of 6.14%. In contrast, BT has a minimum error of 9.23% and a maximum error of 11.82% compared with the original misclassification error of 7.54%.

4. Discussions

4.1 Variable selection and classification accuracy

In recent years RF has gained popularity as an effective classification method in the remote sensing domain (Ham *et al.* 2005, Pal 2005, Gislason *et al.* 2006, Lawrence *et al.* 2006, Chan and Paelinckx 2008). Results from this study confirm that RF is a robust and accurate method for the combined purpose of variable selection and for the classification of hyperspectral data in an application where (i) the number of samples is limited and (ii) classes have similar spectral characteristics. Statistically, RF deals with the ‘small n large p ’ problem, by using a user defined random selection of variables ($mtry$) to grow each classification tree (Breiman 2001). Hence, each classification tree is grown using only a subset of candidate variables and the problems associated with ‘small n and large p ’ are thereby avoided. Results from this study additionally demonstrate that the suggested default $mtry$ value (\sqrt{p}) by Liaw and Wiener (2002) also achieves the best overall classification accuracies. Furthermore, by

limiting the number of variables used for each split and using classification trees that are not pruned, the computational complexity of RF is reduced, thus making it well suited for hyperspectral data (Gislason *et al.* 2006).

Researchers have shown that RF achieves comparable if not better results than other competing classification methods (Pal 2005, Gislason *et al.* 2006, Chan and Paelinckx 2008). Results from this study confirm that RF has lower misclassification errors than BT for all three variable selection methods, including when all HyMAP SWIR bands (64 bands) are used. However, the difference in error between RF and BT is minimal (<2%). Chan and Paelinckx (2008) and Gislason *et al.* (2006) reported similar findings on the small differences in the classification error between RF and BT. Nevertheless, bands selected by the wrapper approach produce the lowest misclassification error (6.14%) in conjunction with RF. More importantly the wrapper method (i.e. BVS method) simplified the classification process and identified the smallest number of bands that offer the best discriminatory power between the classes. Using the wrapper method, we only used approximately 8% (5 bands) of the total number of HyMAP bands (64 bands) while still producing the best overall classification accuracies. Additionally, by using the wrapper method, we did not have to specify the number of HyMAP bands required for the classification process; rather the method adaptively selected the minimum amount of bands that provide the best classification accuracy.

4.2 Model robustness and the introduction of noise

For all levels of noise, RF produces lower misclassification errors than BT when either the class labels or the reflectance values are changed. BT is known to be particularly sensitive to noise in the training dataset because the algorithm places emphasis on the noisy data; that is, after a few iterations most of the data with large weights are cases where the noisy data have been misclassified (Dietterich 1999, Lawrence *et al.* 2004). Similarly, using 28 non-remote sensing datasets, Hamza and Larocque (2005) found that RF is more robust with respect to noise than other tree-based ensemble methods like BT. The robustness of RF can be explained by the ability of the classification algorithm to exploit the noise in the dataset to create a more diverse classifier (Breiman 2001).

However, changing the class labels causes a greater decline in classification accuracy than altering the reflectance values of the bands. Similar results were reported by DeFries and Chan (2000) when they evaluated tree-based classification algorithms for landcover classifications. Additionally, using non-remote sensing datasets, Zhu and Wu (2004) also reported that classification accuracies decline with an increase in class noise especially when there is a limited number of samples (i.e. $n < p$).

4.3 Understanding reflectance characteristics of green stage *Sirex noctilio* infestations

The importance of the RF algorithm is not only to improve classification accuracy or to reduce data dimensionality but also to deepen our understanding of which SWIR bands are most suitable for discriminating the green stage of infestation. Results show that the HyMAP sensor provides the necessary spectral sensitivity to detect anomalies in SWIR reflectance that will allow remote sensing researchers to effectively detect and monitor the green stage of infestation. More specifically, this study has shown that bands centred at 1990, 2009, 2028, 2047 and 2065 nm have the greatest potential for discriminating the green stage. According to Kumar *et al.* (2001), the absorption

features centred in this region are related to protein, starch and nitrogen with the main absorption feature for starch centred at 2000 nm. As noted earlier, physiological evidence suggests that during the green stage of infestation there is a conversion of foliar starch to sugar and a rapid decrease in depletion of sugar levels (Neumann and Minko 1981). It is only during the later stages of infestation that the breakdown of chlorophyll occurs which is subsequently followed by the collapse of vascular tissue that causes chlorosis, wilting and premature needle fall (Neumann and Minko 1981). These results show that there is a link between the SWIR HyMAP spectral measurements and existing physiological research, thereby improving the chances of detecting the green stage at an airborne level. However, background effects, atmospheric absorption, solar angle and sensor view may all have a confounding influence upon the reflectance properties of the bands centred at 1990, 2009, 2028, 2047 and 2065 nm. For verification purposes, a detailed study relating airborne hyperspectral data to physiological measurements is currently underway.

5. Conclusion

In this article we demonstrated that the random forest algorithm can accurately discriminate between healthy trees and the early stages of *S. noctilio* infestation using SWIR bands. More specifically we have shown that the wrapper method that uses random forest as part of the evaluation process produces the smallest subset of bands with the lowest misclassification error. Bands centred at 1990, 2009, 2028, 2047 and 2065 nm have the greatest potential for discriminating the green stage. Additionally, random forest performs better than boosting trees when noise is introduced into the class labels or the selected bands. However class noise has a more severe impact on the performance of the random forest algorithm. Overall the results from this study additionally confirm that random forest is a robust and accurate method for the combined purpose of variable selection and for the classification of hyperspectral data in an application where (i) the number of samples is limited and (ii) where classes have similar spectral characteristics.

Acknowledgements

We thank Sappi for allowing us access to the Pinewoods plantations. The contributions of Marcel Verleur in identifying *Sirex noctilio* infestations are gratefully acknowledged. We thank Wayne Jones for assisting with the sampling of pine needles. Additionally, we appreciate all the computer programming assistance provided by Chris Muncaster. Eric Economon from the Agricultural Research Centre (ARC) of South Africa provided assistance with the ASD spectroradiometer. Funding for this research was provided by the National Research Foundation (NRF) South Africa.

References

- ARCHER, K.J. and KIMES, R.V., 2008, Empirical characterization of random forest variable importance measures. *Computational Statistics and Data Analysis*, **52**, pp. 2249–2260.
- ASD, 2006, *FieldSpec 3[®] User Manual* (Boulder, CO: Analytical Spectral Devices Inc.).
- BAJCSY, P. and GROVES, P., 2004, Methodology for hyperspectral band selection. *Photogrammetric Engineering and Remote Sensing*, **70**, pp. 793–802.
- BREIMAN, L., 2001, Random forests. *Machine Learning*, **45**, pp. 5–32.
- BREIMAN, L., FRIEDMAN, J., OLSHEN, R. and STONE, C., 1984, *Classification and Regression Trees*, pp. 368 (California: Wadsworth & Brooks).

- BRUZZONE, L. and SERPICO, S.B., 2000, A technique for feature selection in a multiclass problem. *International Journal of Remote Sensing*, **21**, pp. 549–563.
- CHAN, J.C. and PAELINCKX, 2008, Evaluation of random forest and adaboost tree-based ensembles classification and spectral band selection for ecotope mapping airborne hyperspectral imagery. *Remote Sensing of the Environment*, **112**, pp. 2999–3011.
- COLLINS, J.B. and WOODCOCK, C., 1996, An assessment of several linear change detection techniques for mapping forest mortality using multitemporal Landsat TM data. *Remote Sensing of Environment*, **56**, pp. 66–77.
- CULP, M., JOHNSON, K. and MICHAILIDES, G., 2006, ada: an R package for stochastic boosting. *Journal of Statistical Software*, **17**, pp. 1–27.
- DEFRIES, R.S. and CHAN, J.C., 2000, Multiple criteria for evaluating machine learning algorithms for landcover classification from satellite data. *Remote Sensing of the Environment*, **74**, pp. 503–515.
- DIAZ-URIARTE, R. and ALVAREZ DE ANDRES, S., 2006, Gene selection and classification of microarray data using random forest. *BMC Bioinformatics*, **7**, pp. 1–13.
- DIETTERICH, T.G., 1999, An experimental comparison of three methods for constructing ensembles of decision tree: bagging, boosting and randomization. *Machine Learning*, **40**, pp. 1–22.
- EFRON, B. and TIBSHIRANI, R., 1993, *An Introduction to Bootstrapping*, p. 436 (New York: Chapman & Hall/CRC).
- EFRON, B. and THIBSHIRANI, R.J., 1997, Improvements on cross-validation: the .632+ bootstrap method. *Journal American Statistical Association*, **92**, pp. 548–560.
- FREUND, Y. and SHAPIRO, R.E., 1996, Experiments with a new boosting algorithm. In *Machine Learning: Proceedings of the 13th International Conference*, 3–6 July 1996, Bari, Italy, pp. 148–156 (San Francisco: Morgan Kaufmann).
- GARZON, M.B., BLAZEK, R., NETELER, M., DE DIOS, R.S., OLLERO, H. S. and FURLANELLO, C., 2006, Predicting habitat suitability with machine learning models: the potential area of *Pinus sylvestris* L. in the Iberian Peninsula. *Ecological Modelling*, **197**, pp. 383–393.
- GISLASON, P.O., BENEDIKTSSON, J.A. and SVEINSSON, J.R., 2006, Random forests for land cover classification. *Pattern Recognition Letters*, **27**, pp. 294–300.
- GRANITTO, P.M., FURLANELLO, C., BIASIOLI, F. and GASPERI, F., 2006, Recursive feature elimination with random forest for PTR-MS analysis of agroindustrial products. *Chemometrics and Intelligent Laboratory Systems*, **83**, pp. 83–90.
- GUYON, I. and ELISSEFF, A., 2003, An introduction to variable and feature selection. *Journal of Machine Learning Research*, **3**, pp. 1157–1182.
- HAM, J., CHEN, Y., CRAWFORD, M. and GHOSH, J., 2005, Investigation of the Random Forest framework for classification of hyperspectral data. *IEEE Transactions on Geoscience and Remote Sensing*, **43**, pp. 492–501.
- HAMZA, M. and LAROCQUE, D., 2005, An empirical comparison of ensemble methods based on classification trees. *Journal of Computation and Simulation*, **75**, pp. 629–643.
- HURLEY, B.P., SLIPPERS, B., CROFT, P.K., HATTING, H.J., VAN DER LINDE, M., MORRIS, A.R., DYER, C. and WINGFIELD, M.J., 2008, Factors influencing parasitism of *Sirex noctilio* (Hymenoptera: Siricidae) by the nematode *Deladenus siricidicola* (Nematoda: Neotylenchidae) in summer rainfall areas of South Africa. *Biological Control*, **45**, pp. 450–459.
- ISMAIL, R., MUTANGA, O. and AHMED, F., 2008a, Discriminating *Sirex noctilio* attack in pine forest plantations in South Africa using high spectral resolution data. In *Hyperspectral Remote Sensing of Tropical and Sub-Tropical Forests*, M. Kalacska and A. Sanchez-Azofeifa (Eds.), pp. 161–174 (London: Taylor & Francis/CRC Press).
- ISMAIL, R., MUTANGA, O. and BOB, U., 2007, Forest health and vitality: the detection and monitoring of *Pinus patula* trees infected by *Sirex noctilio* using digital multispectral imagery (DMSI). *Southern Hemisphere Forestry Journal*, **69**, pp. 39–47.
- ISMAIL, R., MUTANGA, O., KUMAR, L. and BOB, U., 2008b, Determining the optimal resolution of remotely sensed data for the detection of *Sirex noctilio* infestations in *Pinus patula*

- plantations in KwaZulu–Natal, South Africa. *The South African Geographical Journal*, **90**, pp. 196–204.
- JIN, S. and SADER, S., 2005, Comparison of time series tasseled cap wetness and the normalised moisture index in detecting forest disturbances. *Remote Sensing of Environment*, **94**, pp. 364–372.
- KAVZOGLU, T. and MATHER, P.M., 2002, The role of feature selection in artificial neural network applications. *International Journal of Remote Sensing*, **23**, pp. 2919–2937.
- KOHAVID, R. and JOHN, G.H., 1997, Wrappers for feature subset selection. *Artificial Intelligence Journal*, **97**, pp. 273–324.
- KOHAVID, R., SOMMERFIELD, D. and DOUGHERTY, J., 1997, Data mining using MLC++: a machine learning library in C++. *International Journal of Artificial Intelligence Tools*, **6**, pp. 537–566.
- KUMAR, L., SCHMIDT, K.S., DURY, S. and SKIDMORE, A., 2001, Review of hyperspectral remote sensing and vegetation science. In *Imaging Spectrometry: Basic Principles and Prospective Applications*, F. van der Meer and S. M. de Jong (Eds.), pp. 111–155 (Dordrecht: Kluwer Academic Press).
- LANGREBE, D., 2002, Hyperspectral image data analysis. *IEEE Signal Processing Magazine*, **19**, pp. 17–28.
- LAWRENCE, R., BUNN, A., POWELL, S. and ZAMBON, M., 2004, Classification of remotely sensed imagery using stochastic gradient boosting as a refinement of classification tree analysis. *Remote Sensing of the Environment*, **90**, pp. 331–336.
- LAWRENCE, R.L. and LABUS, M., 2003, Early detection of Douglas-fir beetle infestation with subcanopy resolution hyperspectral imagery. *Western Journal of Applied Forestry*, **18**, pp. 1–5.
- LAWRENCE, R.L., WOOD, S.D. and SHELEY, R.L., 2006, Mapping invasive plants using hyperspectral imagery and Breiman Cutler classifications (RandomForests). *Remote Sensing of Environment*, **100**, pp. 356–362.
- LIAW, A. and WIENER, M., 2002, Classification and regression by randomForest. *R News*, **2**, pp. 18–22.
- MACFARLANE, D., 2004, *State of the Environment Report: Comrie-HCV Area, Important Rivers and Streams*, p. 54 (Pietermaritzburg: Sappi).
- MOLINARO, A.M., SIMON, R. and PFEIFFER, R.M., 2005, Prediction error estimation: a comparison of resampling methods. *Bioinformatics*, **21**, pp. 3301–3307.
- MUTANGA, O. and SKIDMORE, A., 2004, Integrating imaging spectrometry and neural networks to map grass quality in the Kruger National Park, South Africa. *Remote Sensing of Environment*, **90**, pp. 104–115.
- MUTANGA, O. and SKIDMORE, A.K., 2005, Discriminating tropical grass grown under different nitrogen treatments using hyperspectral data resampled to HYMAP. *International Journal of Geoinformatics*, **1**, pp. 21–32.
- NEUMANN, F.G. and MINKO, G., 1981, The *Sirex* woodwasp in Australian radiata pine plantations. *Australian Forestry*, **44**, pp. 46–63.
- PAL, M., 2005, Random forest classifier for remote sensing classification. *International Journal of Remote Sensing*, **26**, pp. 217–222.
- PAL, M., 2007, Ensemble learning with decision tree for remote sensing classification. *World Academy of Science, Engineering and Technology*, **36**, pp. 258–260.
- PAL, M. and MATHER, M., 2004, Assessment of the effectiveness of support vector machines for hyperspectral data. *Future Generation Computer Systems*, **20**, pp. 1215–1225.
- PETERS, A., HOTHORN, T. and LAUSEN, B., 2002, ipred: improved predictors. *R News*, **2**, pp. 33–36.
- PETERS, J., DE BAETS, B., VERHOEST, N., SAMSON, R., DEGROEVE, S., DE BECKER, P. and HUYBRECHTS, W., 2007, Random forest as a tool for ecohydrological distribution modelling. *Ecological Modelling*, **207**, pp. 304–318.

- PONTIUS, J., HALLET, R. and MARTIN, M., 2005a, Assessing Hemlock decline using visible and near-infrared spectroscopy: indices comparison and algorithm development. *Applied Spectroscopy*, **59**, pp. 836–843.
- PONTIUS, J., HALLET, R. and MARTIN, M., 2005b, Using AVIRIS to assess hemlock abundance and early decline in Catskills, New York. *Remote Sensing of Environment*, **97**, pp. 163–173.
- PONTIUS, J., MARTIN, M., PLOURDE, L. and HALLETT, R., 2008, Ash decline assessment in emerald ash borer-infested regions: a test of tree-level, hyperspectral technologies. *Remote Sensing of the Environment*, **112**, pp. 2665–2676.
- PRASAD, A., IVERSON, L. and LIAW, A., 2006, Newer classification and regression tree techniques: bagging and random forests for ecological prediction. *Ecosystems*, **9**, pp. 181–199.
- R DEVELOPMENT CORE TEAM, 2008, *R: A Language and Environment for Statistical Computing*. (Vienna: R Foundation for Statistical Computing).
- SCHMIDT, K.S. and SKIDMORE, A.K., 2001, Exploring spectral discrimination of grass species in African rangelands. *International Journal of Remote Sensing*, **22**, pp. 3421–3434.
- SCHOLES, B. and ANNAMALAI, L., 2006, CSIR imaging expertise propels SA to a science high. *Aerospace Science Scope*, **1**, pp. 19–21.
- SKAKUN, R.S., WULDER, M.A. and FRANKLIN, S.E., 2003, Sensitivity of the thematic mapper enhanced wetness difference index to detect mountain pine beetle red-attack damage. *Remote Sensing of the Environment*, **86**, pp. 433–443.
- SOH, L.K., 1999, Segmentation of satellite imagery of natural scenes using data mining. *IEEE Transactions on Geoscience and Remote Sensing*, **37**, pp. 1086–1099.
- STIMSON, H., BRESHEARS, D., USTIN, S. and KEFAUVER, S., 2005, Spectral sensing of foliar water conditions in two co-occurring conifer species: *Pinus edulis* and *Juniperus monosperma*. *Remote Sensing of Environment*, **96**, pp. 108–118.
- STROBL, C., BOULESTEIX, A., ZEILEIS, A. and HOTHORN, T., 2007, Bias in random forest variable importance measures: Illustrations, sources and a solution. *BMC Bioinformatics*, **8**, pp. 1–25.
- SVETNIK, V., LIAW, A., TONG, C., CULBERSON, J., SHERIDAN, R. and FEUSTON, B., 2003, Random Forest: A classification and regression tool for compound classification and QSAR modeling. *Journal of Chemical Information and Computer Science*, **43**, pp. 1947–1958.
- SVETNIK, V., LIAW, A., TONG, C. and WANG, T., 2004, Application of Breiman's random forest to modeling structure–activity relationships of pharmaceutical molecules. In *Multiple Classifier Systems, Fifth International Workshop, MCS 2004*, 9–11 June 2004, Cagliari, Italy, pp. 334–343 (Berlin: Springer).
- TRIBE, G.D. and CILLIE, J.J., 2004, The spread of *Sirex noctilio* Fabricius (Hymenoptera: Siricidae) in South African pine plantations and the introduction and establishment of its biological control agents. *African Entomology*, **12**, pp. 9–17.
- VAIPHASA, C., ONGSOMWANG, S., VAIPHASA, T. and SKIDMORE, A.K., 2005, Tropical mangrove species discrimination using hyperspectral data: a laboratory study. *Estuarine, Coastal, and Shelf Science*, **65**, pp. 371–379.
- VAIPHASA, C., SKIDMORE, A., DE BOER, W. and VAIPHASA, T., 2007, A hyperspectral band selector for plant species discrimination. *ISPRS Journal of Photogrammetry and Remote Sensing*, **62**, pp. 225–235.
- VAN AARDT, J. and COPPIN, P., 2006, Current state and potential of the IS-HS project: Integration of insitu data and hyperspectral remote sensing for plant production modelling. In *Precision Forestry in Plantations, Semi-Natural and Natural Forests, IUFRO International Precision Forestry Symposium*, 5–10 March 2006, Stellenbosch, South Africa, pp. 33–41 (Stellenbosch: Stellenbosch University).
- ZHU, X. and WU, X., 2004, Class noise vs attribute noise: A quantitative study. *Artificial Intelligence Review*, **22**, pp. 177–210.